


(SK - RTG99)

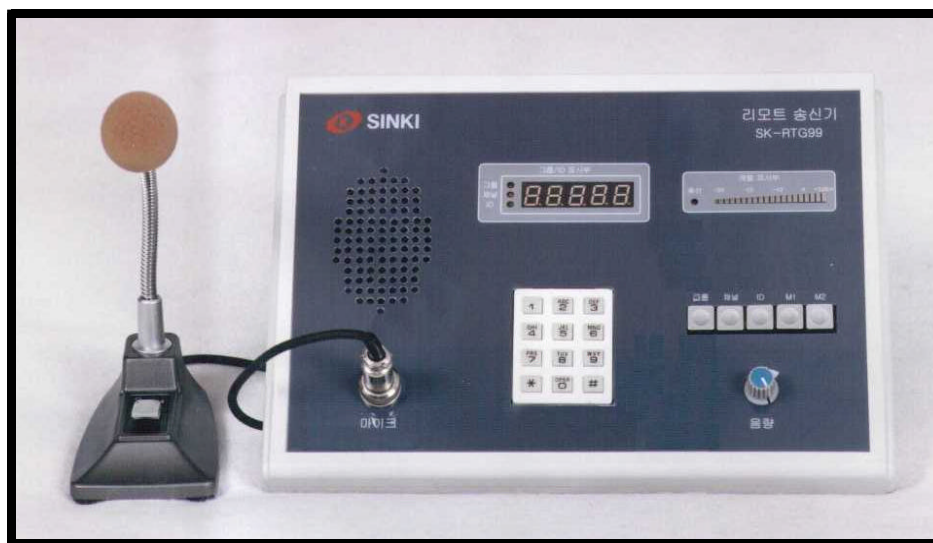

 **SINKI ELECTRONICS CO., LTD.**

()

431 - 824

3 1032-13

TEL : (031) 384-2784

FAX : (031) 384-8897


1.

(2175Hz) GuardTone ,

1

가 ,

2.

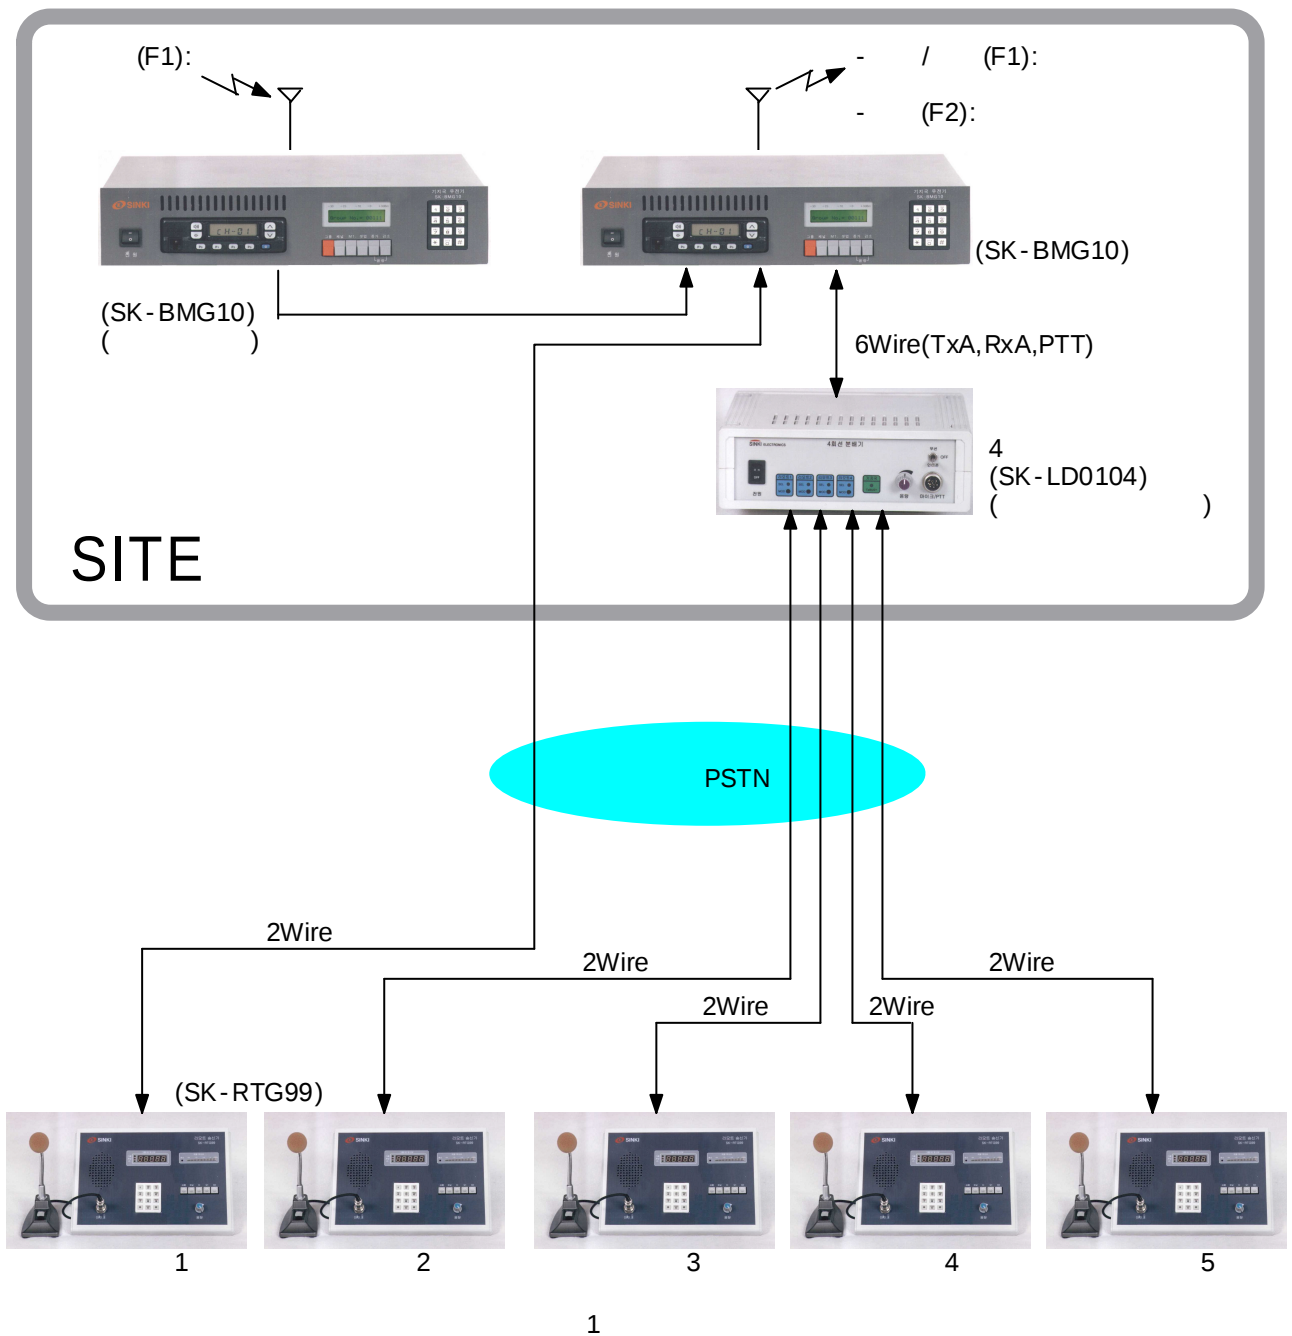

2.

1) 5

2) Guard Tone(2175Hz)

3) 2 (2Wire), (2175Hz) 가

4) , 가

5) 가 가

6) ,

7) (SK-BMG10)


8) 2 , (SK-RTG99)

Guard Tone(2175Hz) , Active Notch Filter

가

3.

3.1

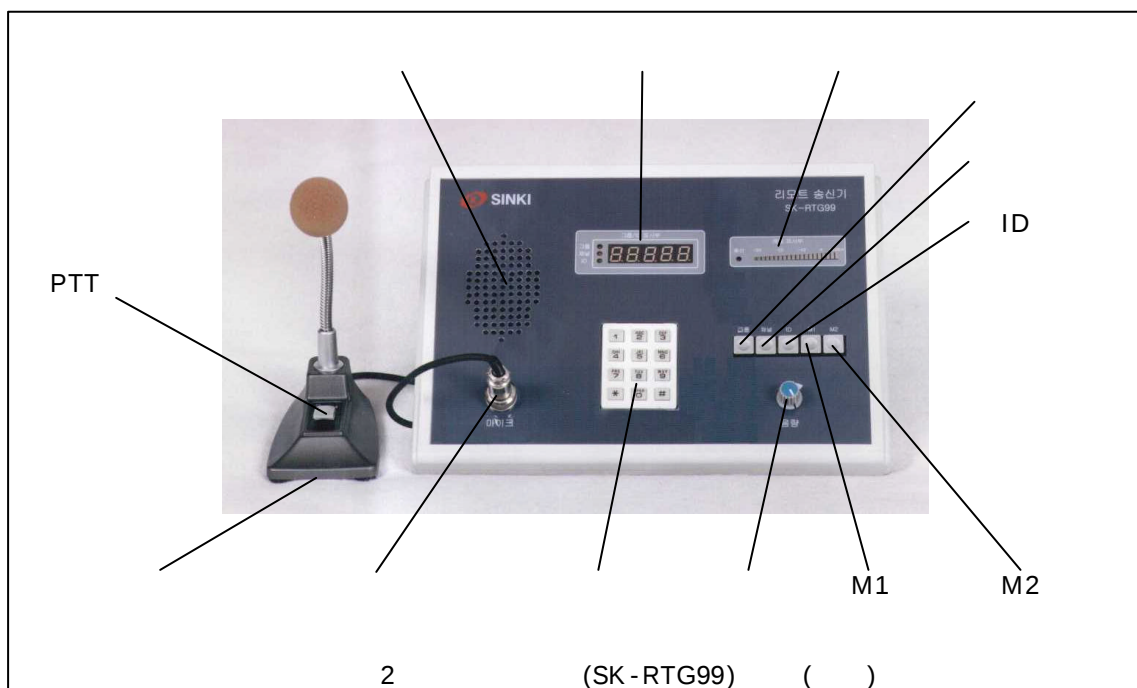


(SK-RTG99)


7 2

PTT : 가 .

: 가 ,



1	(H)
2	(H)
3	(L)
4	
5	PTT(H)
6	PTT(L)
7	GND
8	

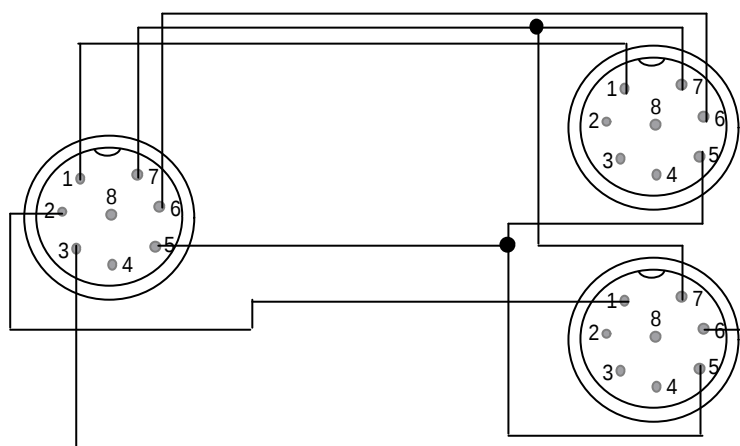

: .

0~9: , #: , *:

: .()

M1 : .

M2 : .


ID : .

: .

: .

: , .
 : .
 : 가 .

3.1

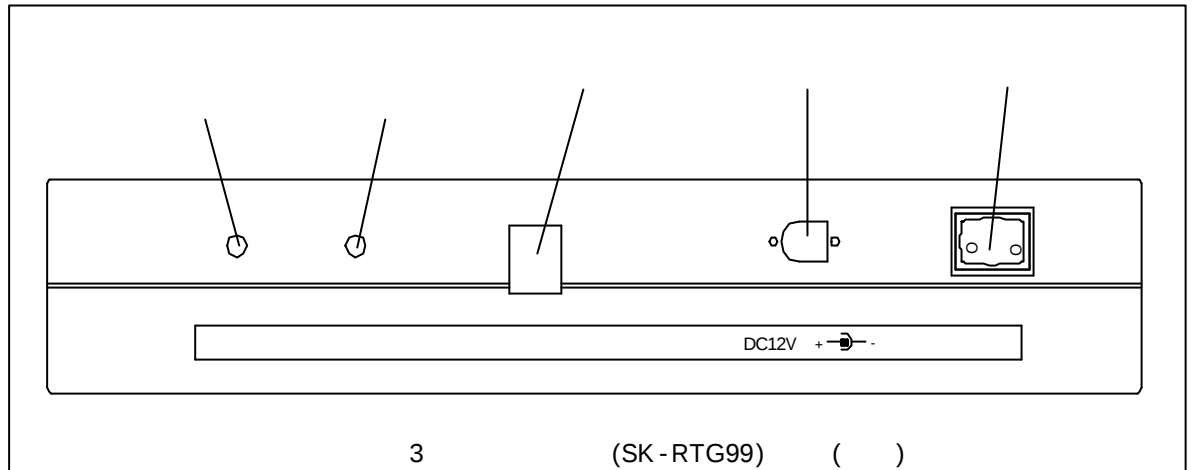

: (SK-RTG99) (SK-BMG10)

: (SK-RTG99)가 (SK-BMG10)

: (SK-BMG10)

: (SK-RTG99)가 +12V

: (SK-RTG99) ON/OFF

ㄴ

4.

4.1


AC

, 110/220V

. DC

(SK-RTG99)

가 OFF

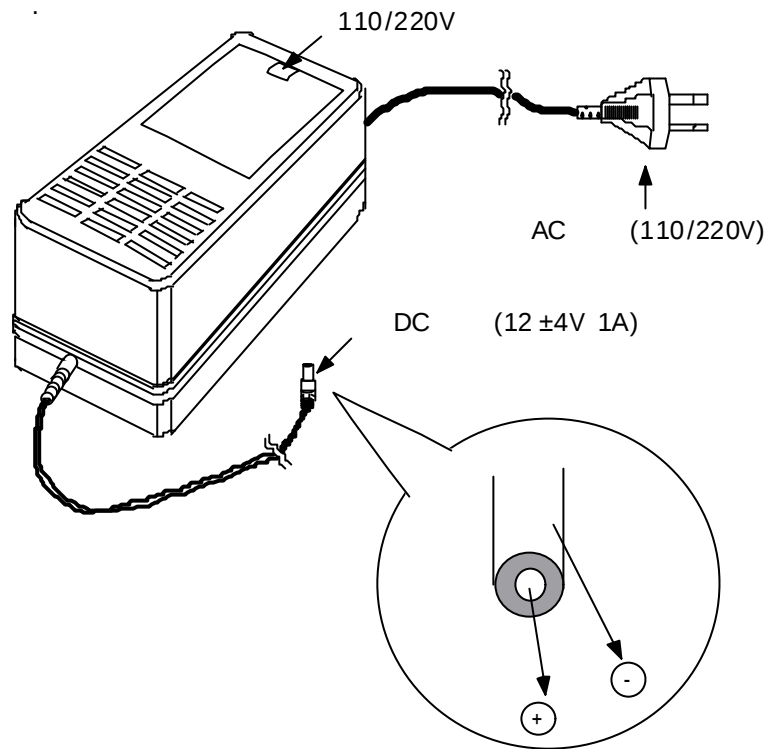


4.2

(SK-RTG99)



4.3



4.4

.
(SK - RTG99) (SK - BMG10)
. (5)
(SK - BMG10) ,
(SK - RTG99) (SK - BMG10) .

5.

5.1

(SK - RTG99) " " "PTT " .
(SK - RTG99) "12345" 가 , 5
, 가 .
(SK - RTG99) " "
가 " _ _ _ _ " ,
.

5.2

(SK - RTG99) " " "#"
(SK - RTG99) "12" 가 ,
(SK - BMG10) "12" .
(SK - RTG99) " "
가 " _ _ " ,
.

5.3

5.3.1

가 , "12345" 가 "M1"
"M2" 1 " " , 가 .
가 .

5.3.2

가 , "12" 가 "M1"
 "M2" 1 " " , 가 .
 가 .

6.

: 2WIRE TONE(2175Hz)
 : $600\Omega \pm 20\%$ (@1KHz)
 : 0 ± 6 dBm (@600 Ω , 1KHz)
 : -25 ± 6 dBm(@600 Ω ,1KHz)
 : -40dB
 : 5
 : MSK (1200 BPS)
 : 01 ~99
 : AC (:AC110V/220V $\pm 10\%$, :DC12/850mA)